


No cylindrical at the bottom of the plastic parts if poles more than three

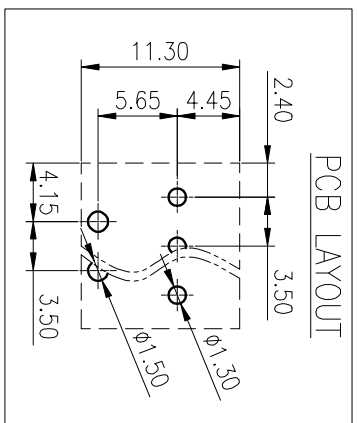

公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>280	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
3	6	10	18	30	50	80	120	180	280	315	400	500	>500	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z

5	Cage	Copper alloy	M2/Ni Plated
4	Pin Header	Copper alloy	Sn Plated
3	Screw	Steel	M2/7n Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准 /UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/75	/	/
IEC 标准/IEC Standard:	/	/	/
过压类别/Overvoltage Category/特类等	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	160/12	160/12	320/12
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	2.5	2.5	2.5
螺丝扭矩/Torque Tightening(N.m/Lb.in)	M2, 0.2/2.0		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	0.2~1.5/30~14		
间距/Pitch(mm)/线距范围/Poles	3.50/N=02~12P		
剥线长度/Stripping length(mm)	6~7		
使用温度范围/Operating Temperature(°C)	-40~+105		
符合RoHS要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:	/		
PANTONE / RAL	/		

MATERIAL: SURFACE:

MAT NO.: /

STATUS: /

APPD: Li GL 2020.06.22

CHKD: Mao J 2020.06.22

DRT:Wgng LX 2020.06.22

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**

DG383-3.5-XXP-1Y-00A(H)

DRAWING NO.: DG383-3.5-C01

TYPE: CUSTOMER DRAWING SCALE: 2:1 SHEET 1/1

REV EGN DESCRIPTION

DRT DATE

SIZE: A4

mm inch

TYPE: CUSTOMER DRAWING

SCALE: 2:1 SHEET 1/1

D

C

B

A

D

C

B

A

1

2

3

4

5

6