
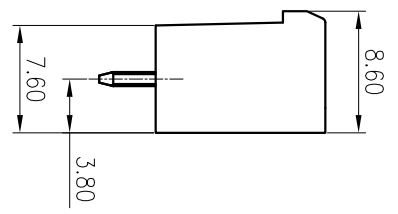
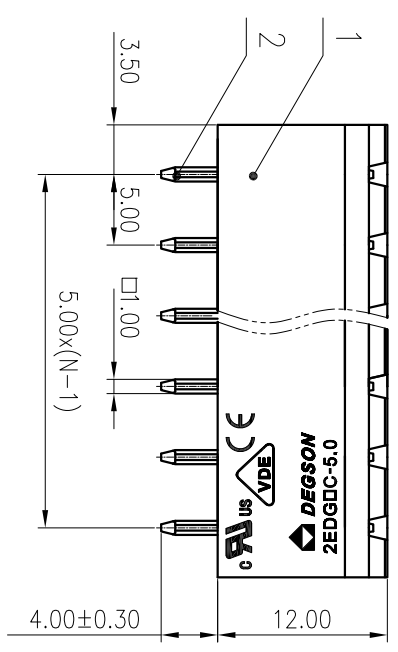
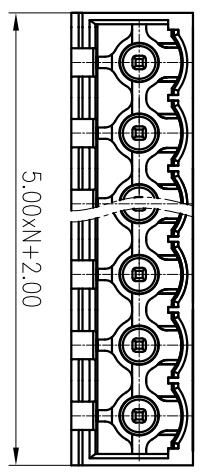


PCB LAYOUT

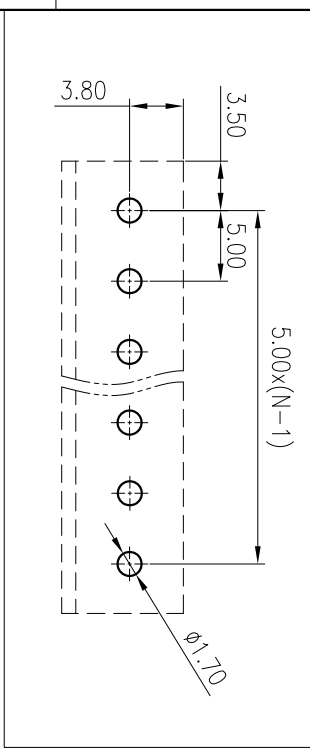

公差等级/General Tolerances(mm)		0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1.0
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±2
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50			

2	Pin	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电流/Rated Voltage(V)/Current(A)		300/15	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree			III/2
额定电压/电流/Rated Voltage(V)/Current(A)			320/20
额定脉冲电压(KV)/Rate Impulse Voltage(KV)			4
可逆/Pitch(mm)/线数范围/Poles			5.0/N=02P~24P
使用温度范围/Operating Temperature(°C)			-40~+105
符合RoHS环保要求/Conform to RoHS			Yes
标准颜色编号/Standard color number:			/
PANTONE / RAL			/

MATERIAL: /  
SURFACE: /

MAT NO.: /  
STATUS: /  
NAME: **DEGSON** NINGBO DEGSON ELECTRICAL CO., LTD

Appd: LonCHH 2020.03.24  
CHKD:GongYzh 2020.03.24  
DRAFT: Fan JY2020.03.24  
DRAWING NO.: 10001604

TYPE: CUSTOMER DRAWING  
SCALE: 2:1  
REV T0  
SHEET 1/1

管 中 心  
发 专 用  
2020.03.24  
(仅限内部使用, 对外无效)

REV	ECN	DESCRIPTION	DRAFT	DATE