


Pitch Range		In mm		Nominal Dimension		Range		In mm	
Over	6	Over	10	Over	30	Over	60	Over	100
TO	10	TO	24	TO	30	TO	60	TO	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2*	

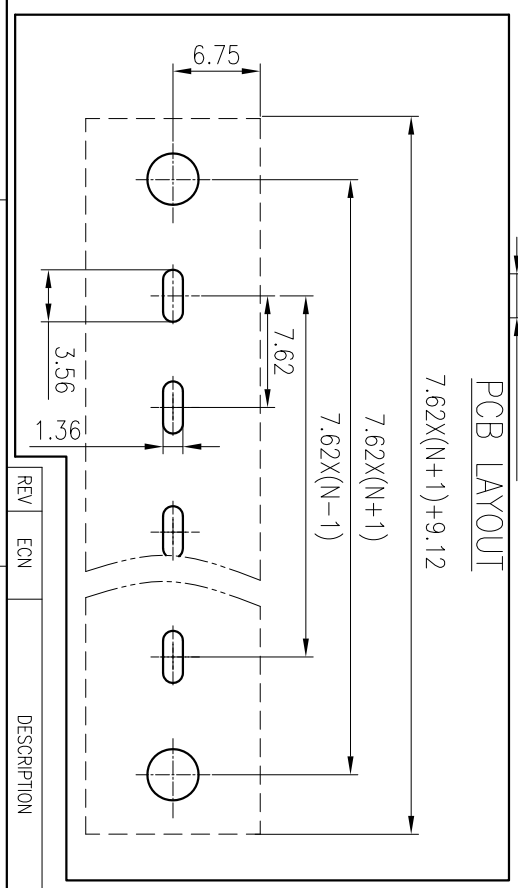

REV	ECN	DESCRIPTION	DRAFT	DATE

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	NAME: DG25H-A-XXP-1Y-00A(H)	
APPD:	/	DRAWING NO.:	DG25H-C03
CHKD:	/	TYPE:	CUSTOMER DRAWING
DRAFT: Zhangju	2020.05.22	SCALE:	2:1
SIZE: A4	mm	SHEET	1/1

ITEM	NAME OF PART	MATERIAL	NOTES
1	HOUSING	PA66	UL94V-0
2	PIN HEADER	COPPER ALLOY	Sn PLATED
3	SCERW	STEEL	NI PLATED

UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)	300/15	300/10	300/10
EC 标准/EC Standard:			
过压类别/Overvoltage Category/污染等	III/3	III/2	I/2
级/ Pollution Degree			
额定电压/电流/Rated Voltage(V)/Current(A)	300/24	300/24	600/24
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	5	5	5
额定扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.5/4.43		
线径范围/Wire Range(AWG)	22~14AWG		
间距/Pitch(mm)/线数范围/Poles	7.62/N=02~24P		
剥线长度/Stripping Length(mm)	7		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		