

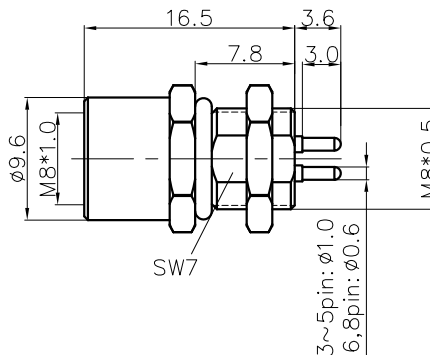


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE



Panel cut

SP-M8X-XXP-FF-SH7002-00A(H)

Coding: A,B

Pin number: 03,04,
05,06,08

NOTES:

- Rated voltage/current : 3pin:60V / 3A
4pin:60V / 3A
5pin:30V / 3A
6pin:30V / 1.5A
8pin:30V / 1.5A
- Withstanding voltage : 3,4pin: AC850V/1Min
5,6,8pin: AC650V/1Min
- Levels of protection:IP67
- Wire connection mode:soldering(PCB)
- Operating temperature: -40°C~+105°C
- For Panel Thickness Range: 2.0~3.0mm
- RoHS Compliance
- Tolerance :

.X	±0.25mm
.XX	±0.1mm
∠	±1°

	3pin A Coding	4pin A Coding	5pin B Coding	6pin A Coding	8pin A Coding
C					
B	Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View
A					
	PCB layout	PCB layout	PCB layout	PCB layout	PCB layout

DETACHED LISTS	PART NO.: SPM8XXXPFFSF700100AH	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: SP-M8X-XXP-FF-SH7002-00A(H)		
	CHKD:	TITLE: CUSTOMER DRAWING		
	DRFT: SQ 2019.05.17	REV	D0-1	
THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXXX-XX-CXX	SHEET	1/1
		MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1