




(Series Image-Reference Only)

Dimension

| Position | A±0.2 | B±0.2 | C±0.3 |
|----------|-------|-------|-------|
| 9 | 17.90 | 24.99 | 30.80 |
| 15 | 26.50 | 33.32 | 39.14 |
| 25 | 40.00 | 47.04 | 53.04 |
| 37 | 56.50 | 63.50 | 69.32 |




NOTES:

- Electrical characteristics:
 - Contact resistance: 20mΩ Max. Initial.
 - Dielectric withstanding voltage: 500V AC(rms) for 1 minute.
 - Insulation resistance: 1000MΩ Min.
- Environment characteristics:
 - Temperature range: -40°C~+105°C.

3. Materials:

- Insulator:PBT+Glass fiber
- Shell:Steel
- Contact:Copper alloy

4. Product number code:

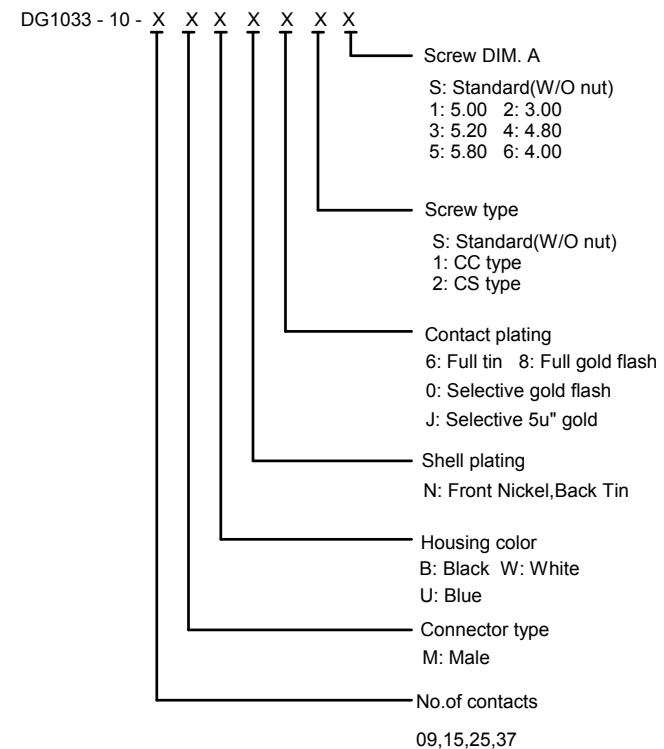

| | | | | |
|-------------------|----------------------|-------------|-------------------|----------------|
| GENERAL TOLERANCE | | | MATERIAL: | SURFACE/COLOR: |
| X. ±0.60 | X ±0.38 | | MAT NO./REV: / 00 | MAT STATUS: 批量 |
| XX ±0.25 | APPD: 兰春华 2023.07.31 | NAME | DG1033-10-XXXXXXX | |
| | CHKD: 陈招 2023.07.28 | | | |
| | DRFT: 唐本恒 2023.07.27 | DRAWING NO. | TYPE | DRAWING STATUS |
| | | 200035036 | CUSTOMER DRAWING | 已发布 |
| 00 | 唐本恒 2023.07.27 | SCALE | 1:1 | SHEET 1/1 |
| REV | ECN | DESCRIPTION | | |
| | | DRFT | DATE | |

| | | |
|-----|------|-------------|
| 00 | 唐本恒 | 2023.07.27 |
| REV | ECN | DESCRIPTION |
| | DRFT | DATE |

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited without the prior written permission of DEGSON. All rights reserved for patent. 未经授权复制或传播本文件内容，以及利用或传播其内容均属于侵权行为。 未经授权复制或传播本文件内容，以及利用或传播其内容均属于侵权行为。