


未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2°

A

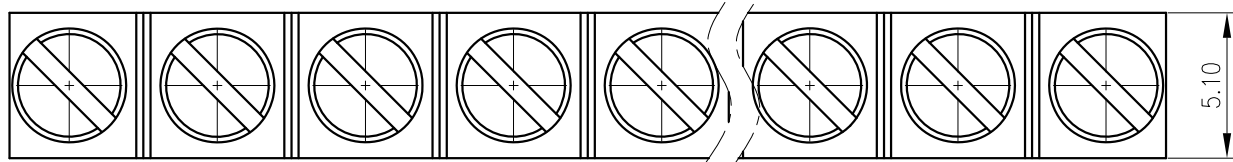


A

B

 $5.2 \times (N-1) + 4.2$

5.20

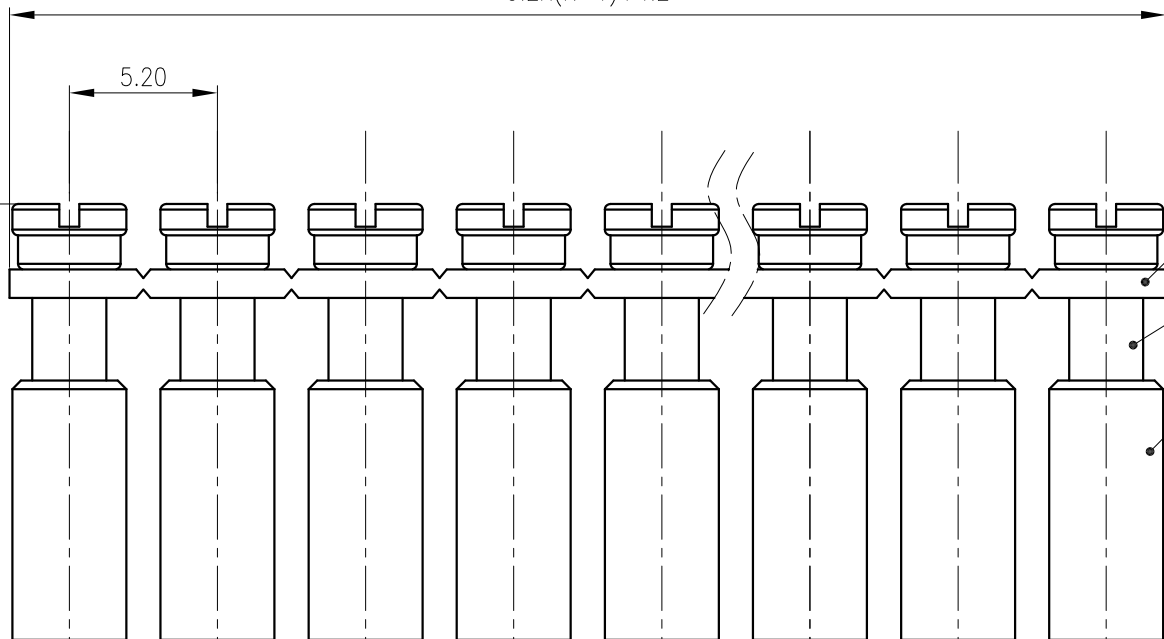

B


C

C

D

D

3	Pillar	Copper Alloy	M3/Ni Plated
2	Screws	Copper Alloy	M3/Ni Plated
1	Current carrier	Copper	Sn Plated
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M3, 0.5/4.43	
间距/Pitch(mm)/线数范围/Poles		5.20/N=02~10P	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL:		SURFACE:			
MAT NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
STATUS: /					
APPD: Li GL 2020.06.06		NAME: FBRI XX-5			
CHKD: Mao J 2020.06.06					
DRFT: Feng X 2020.05.22		DRAWING NO.: FBRI 10-5-C01		REV	TO
	SIZE: A4		TYPE: CUSTOMER DRAWING	SCALE: 4:1	SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------